


- 1:Installing light arm
- 2:Fix the hanging board to the ceiling
- 3:Connect the lamp wires to the reserved wires
- 4:Tighten the nut to secure the lamp body
- 5:Tighten the lampshade with a ring
- 6:Installing bulb

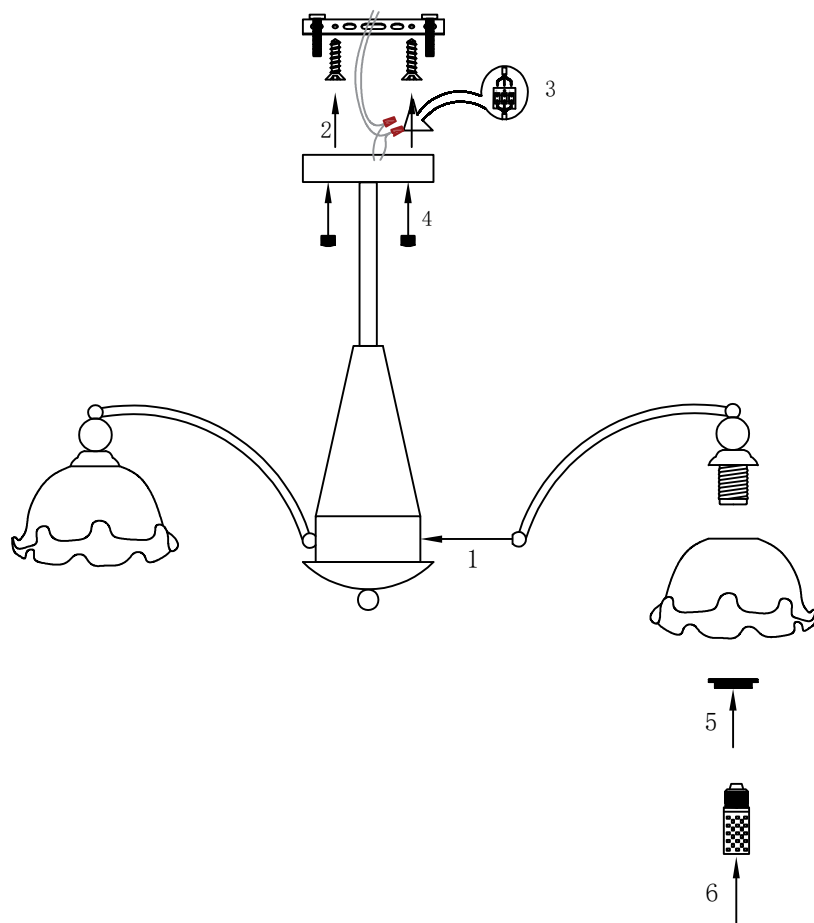

Installation instructions:

1. All L live wires of the light arm lead are connected to the main L live wire, and all N zero wires of the light arm lead are connected
2. Clamp with a wiring cap, tighten the connection and strengthen the insulation with a heat shrink tube.
3. Connect and lock the main ground wire to a separate grounding device on the lamp body.
4. All LED light sources are connected in series (excluding high-voltage LEDs).
5. The LED light source is connected to the driver, and the power cord must be divided into positive and negative poles (excluding high-voltage LEDs).
6. Connecting incorrectly can lead to no lights, short circuits flickering, or burning.