

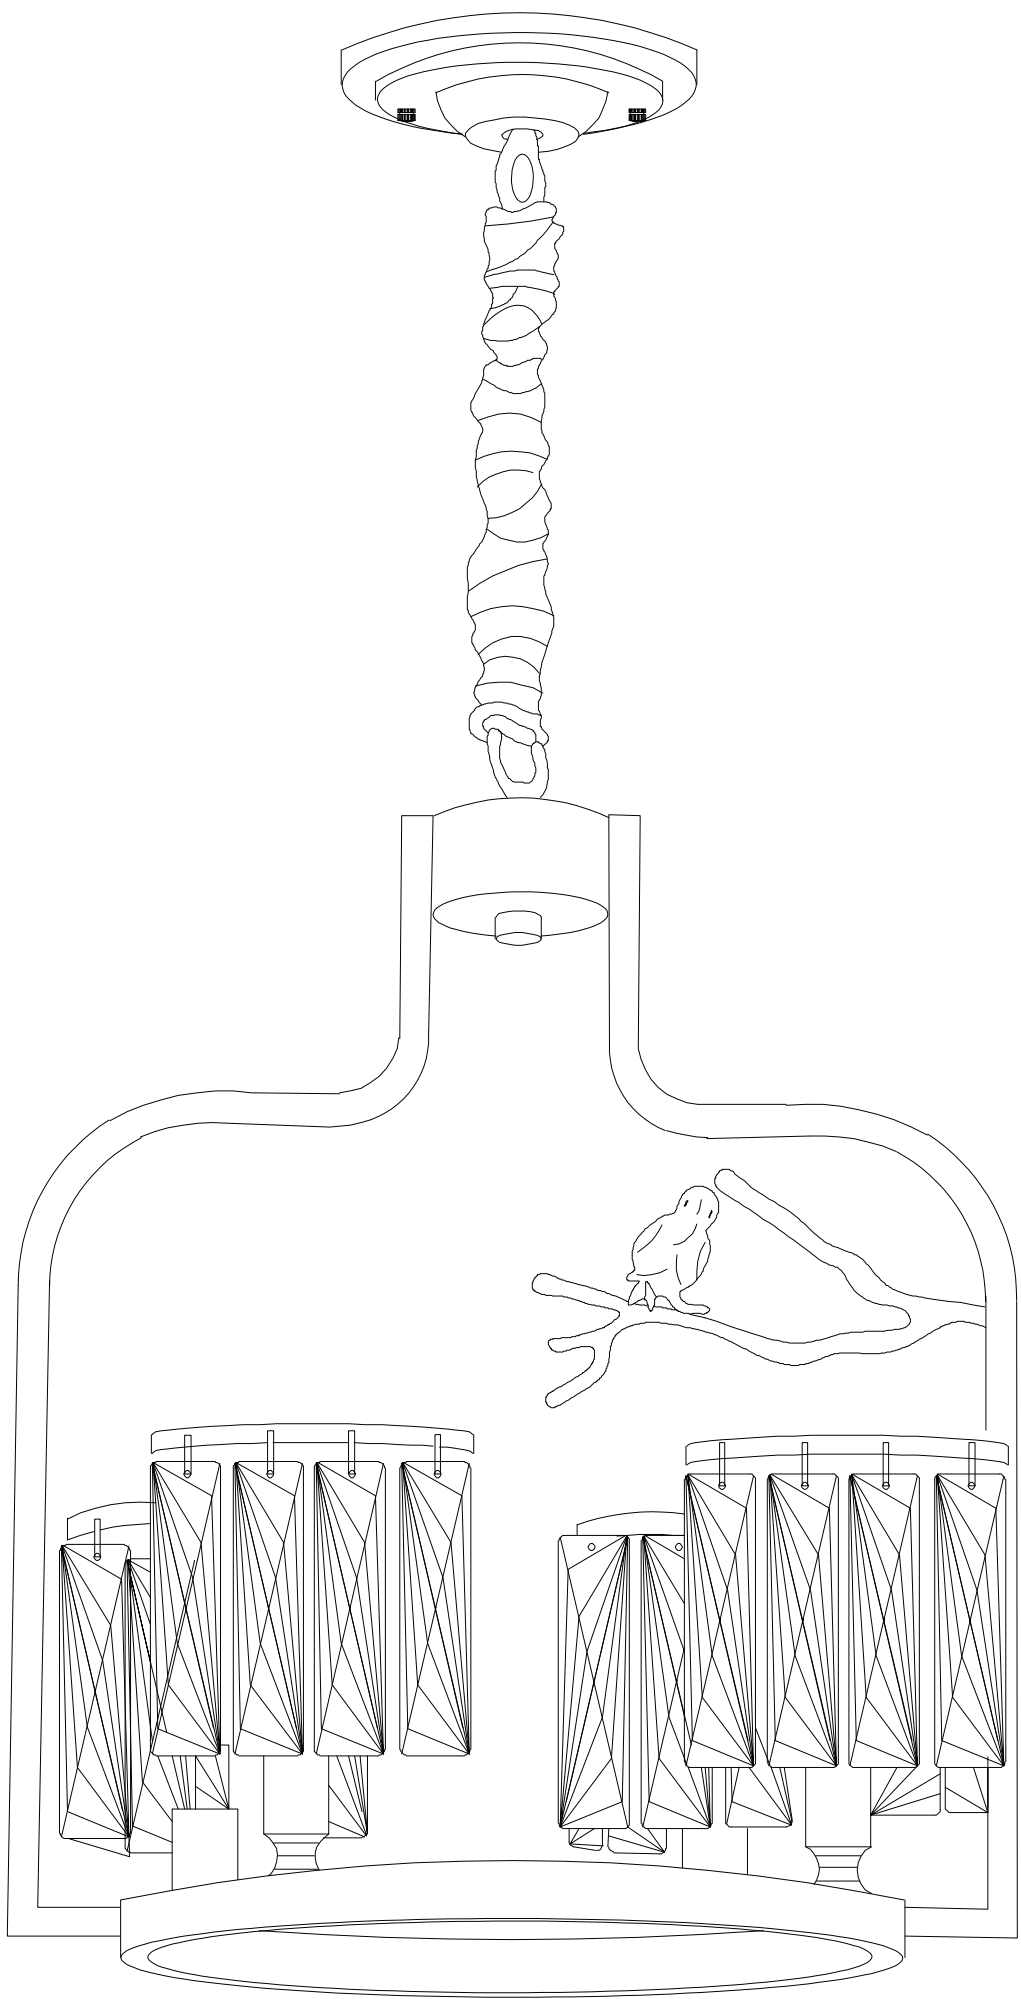


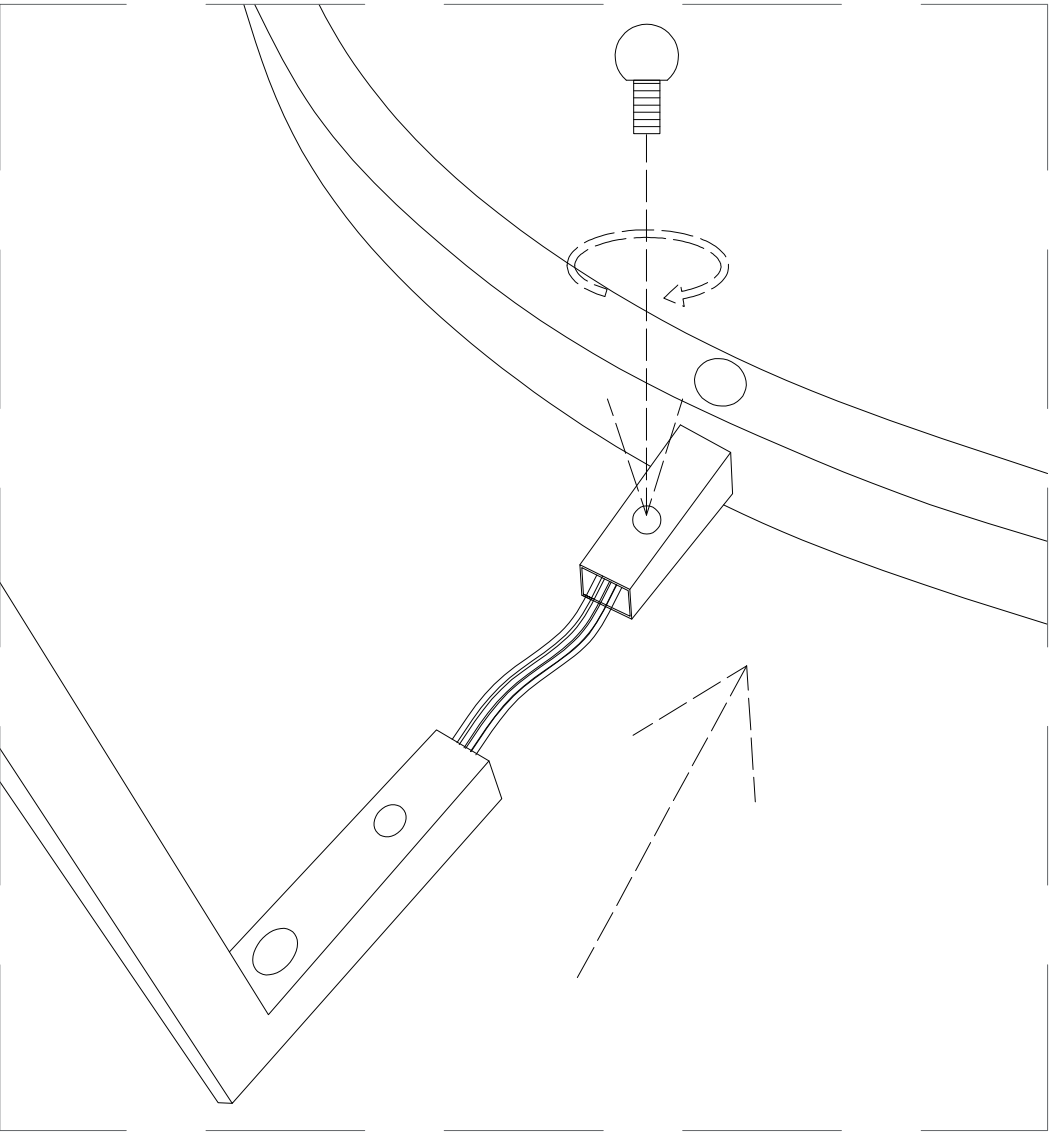


1

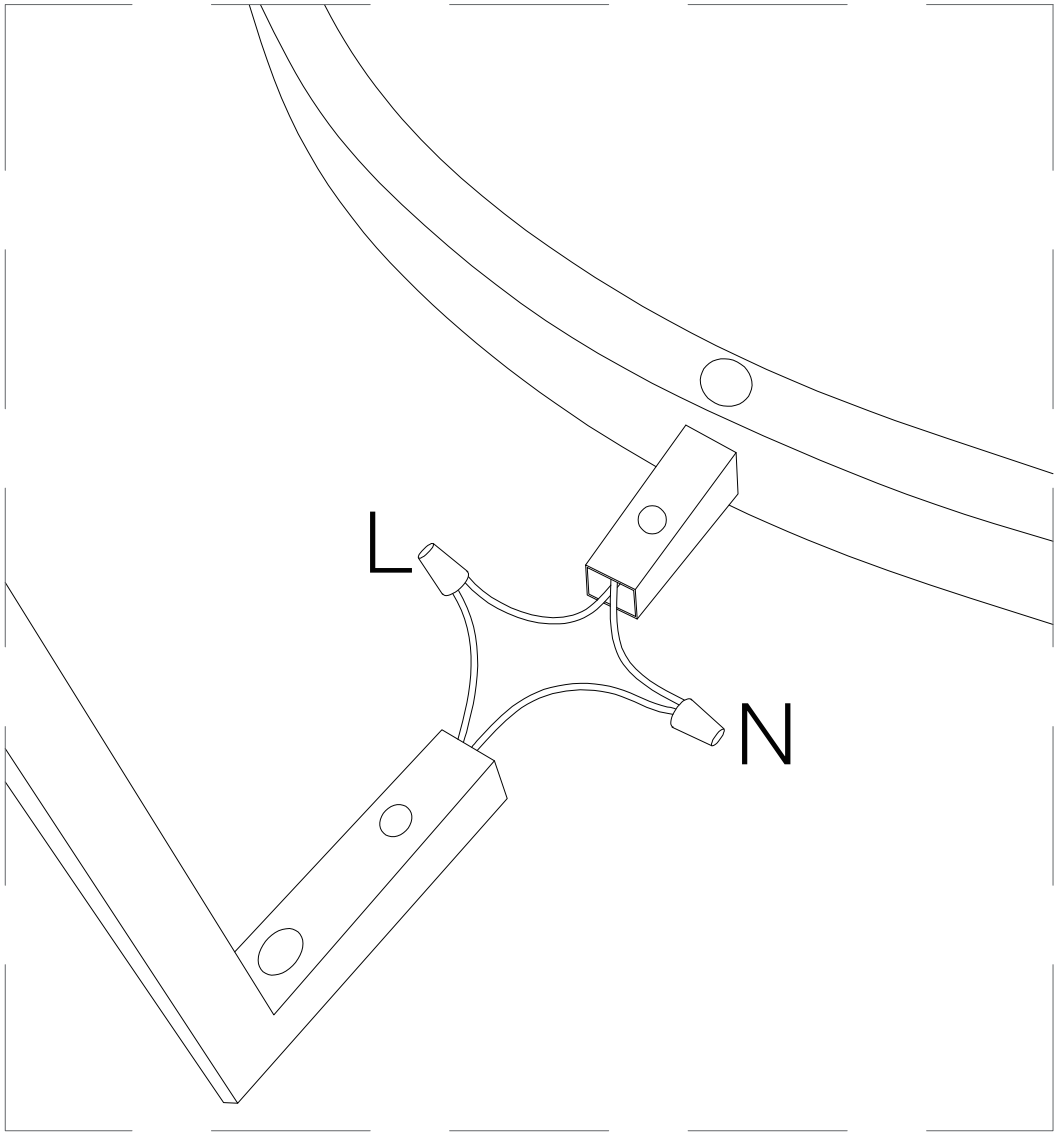

After connecting the wires,
insert them into the square tube,
then insert the square tube into
the corresponding position,
and tighten the tooth rod to lock it.

2

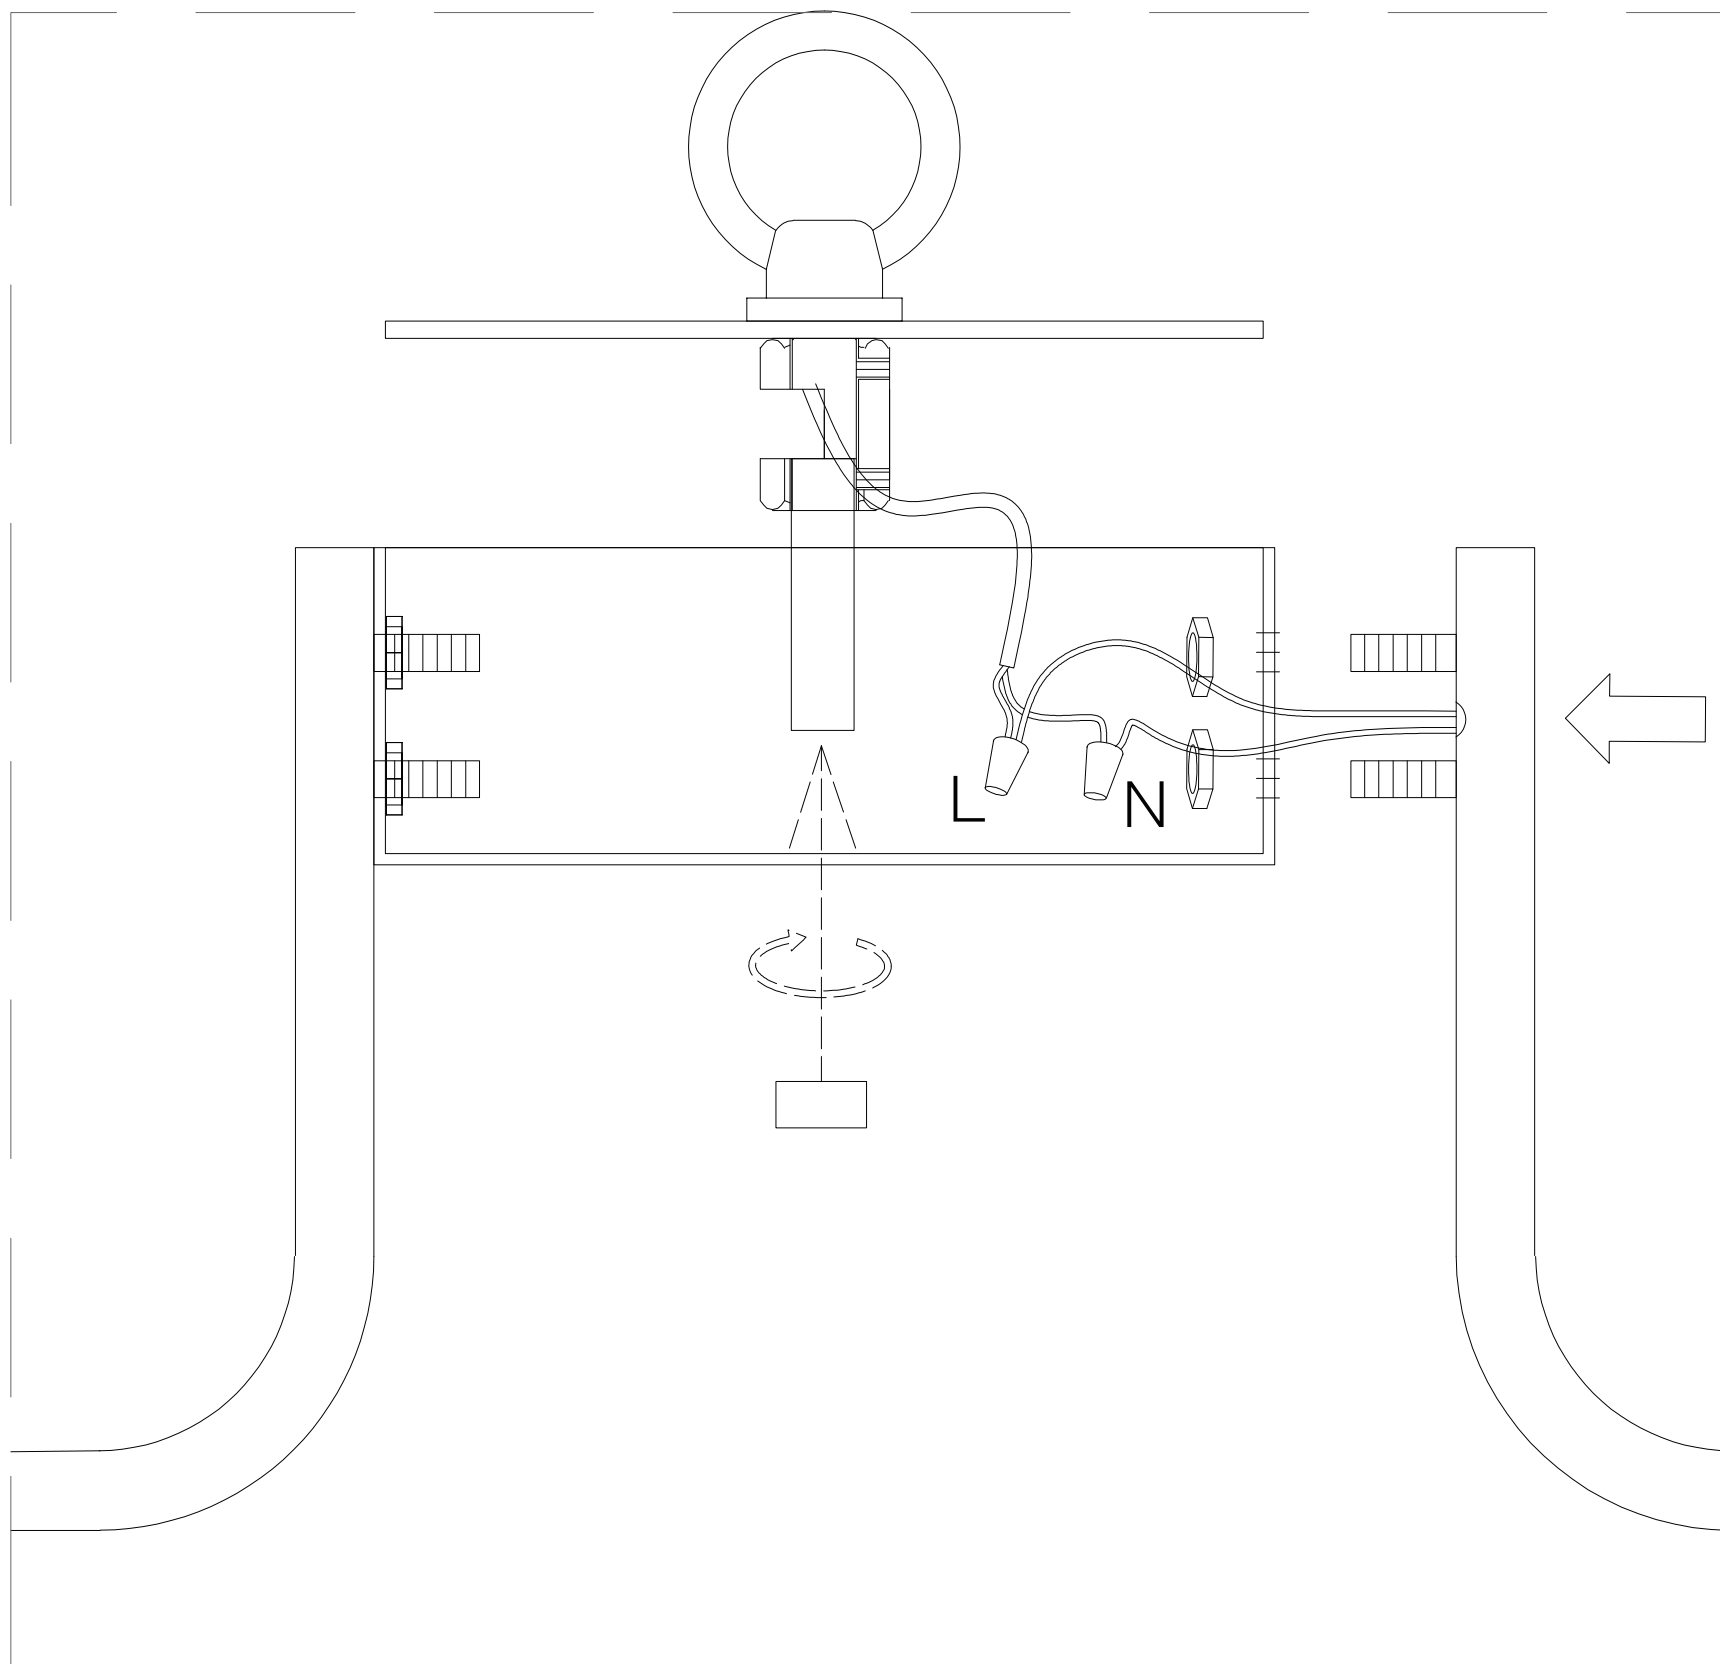

Fix the lamp arm with nuts and then connect the main line

