



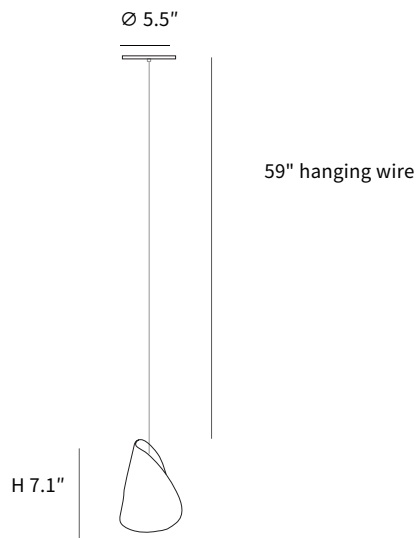

The above dimensions are measured manually and may have an error of 0.1-0.3".

Type	Pendant light Suspension
Environment	Indoor Mounting
Dimensions [cm/in]	1 head Diameter: 14cm/5.5", Height: 18cm/7.1". Standard hanging wire length provided: 150cm/59 ". Additional lengths available upon request (prices upon request)
Light source	Standard: Compatible with G4 socket G4 Bi-Pin Base Bulbs, AC 110V(Do Not Use in Low Voltage 12V). (Not included bulbs)
Finishes	Lamp body: White. Available for selection.
Construction material	Ceramics. If damaged during transportation, it can be reissued.


Drawing

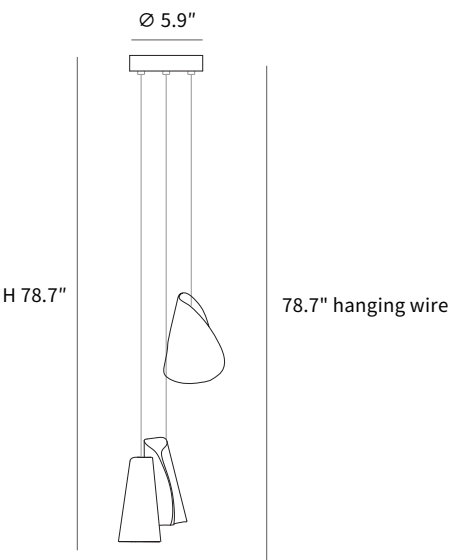

The above dimensions are measured manually and may have an error of 0.1-0.3".

Type	Pendant light Suspension
Environment	Indoor Mounting
Dimensions [cm/in]	3 heads Diameter: 15cm/5.9", Height: 200cm/78.7". Standard hanging wire length provided: 200cm/78.7". Additional lengths available upon request (prices upon request)
Light source	Standard: Compatible with G4 socket G4 Bi-Pin Base Bulbs, AC 110V(Do Not Use in Low Voltage 12V). (Not included bulbs)
Finishes	Lamp body: White. Available for selection.
Construction material	Ceramics. If damaged during transportation, it can be reissued.


Drawing

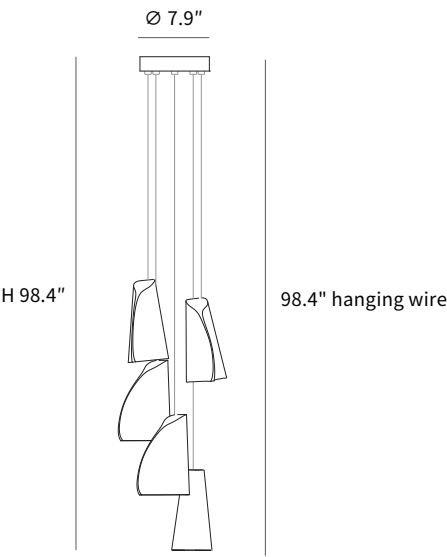

The above dimensions are measured manually and may have an error of 0.1-0.3".

Type	Pendant light Suspension
Environment	Indoor Mounting
Dimensions [cm/in]	5 heads Diameter: 20cm/7.9", Height: 250cm/98.4". Standard hanging wire length provided: 250cm/98.4". Additional lengths available upon request (prices upon request)
Light source	Standard: Compatible with G4 socket G4 Bi-Pin Base Bulbs, AC 110V(Do Not Use in Low Voltage 12V). (Not included bulbs)
Finishes	Lamp body: White. Available for selection.
Construction material	Ceramics. If damaged during transportation, it can be reissued.


Drawing

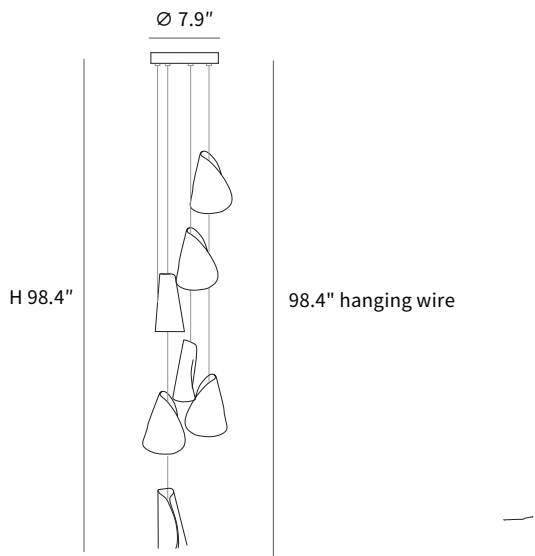

The above dimensions are measured manually and may have an error of 0.1-0.3".

Type	Pendant light Suspension
Environment	Indoor Mounting
Dimensions [cm/in]	7 heads Diameter: 20cm/7.9", Height: 250cm/98.4". Standard hanging wire length provided: 250cm/98.4". Additional lengths available upon request (prices upon request)
Light source	Standard: Compatible with G4 socket G4 Bi-Pin Base Bulbs, AC 110V(Do Not Use in Low Voltage 12V). (Not included bulbs)
Finishes	Lamp body: White. Available for selection.
Construction material	Ceramics. If damaged during transportation, it can be reissued.


Drawing

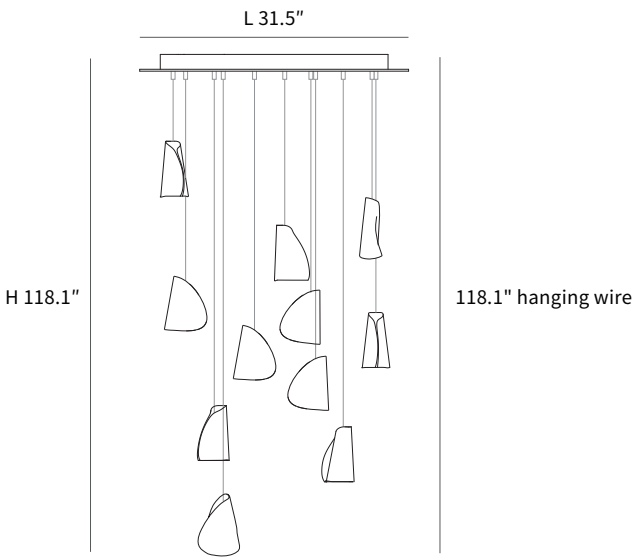

The above dimensions are measured manually and may have an error of 0.1-0.3".

Type	Pendant light Suspension
Environment	Indoor Mounting
Dimensions [cm/in]	11 heads Length: 80cm/31.5", Height: 300cm/118.1". Standard hanging wire length provided: 300cm/118.1". Additional lengths available upon request (prices upon request)
Light source	Standard: Compatible with G4 socket G4 Bi-Pin Base Bulbs, AC 110V(Do Not Use in Low Voltage 12V). (Not included bulbs)
Finishes	Lamp body: White. Available for selection.
Construction material	Ceramics. If damaged during transportation, it can be reissued.


Drawing

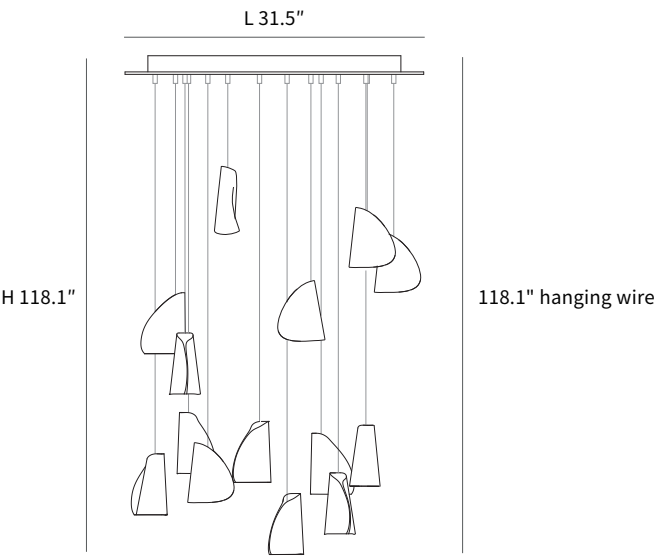

The above dimensions are measured manually and may have an error of 0.1-0.3".

Type	Pendant light Suspension
Environment	Indoor Mounting
Dimensions [cm/in]	14 heads Length: 80cm/31.5", Height: 300cm/118.1". Standard hanging wire length provided: 300cm/118.1". Additional lengths available upon request (prices upon request)
Light source	Standard: Compatible with G4 socket G4 Bi-Pin Base Bulbs, AC 110V(Do Not Use in Low Voltage 12V). (Not included bulbs)
Finishes	Lamp body: White. Available for selection.
Construction material	Ceramics. If damaged during transportation, it can be reissued.


Drawing

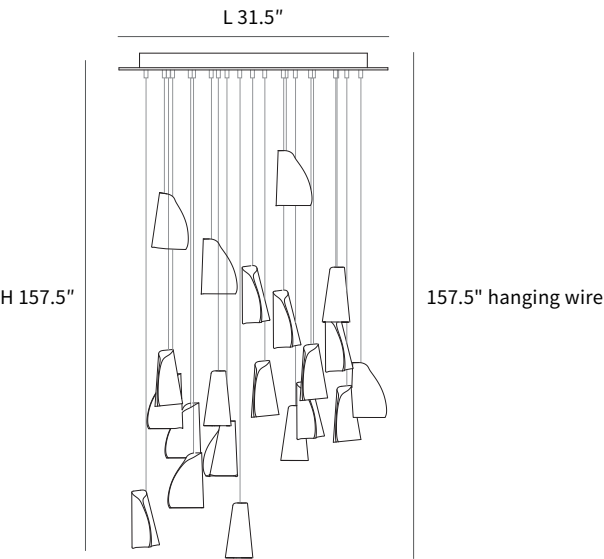

The above dimensions are measured manually and may have an error of 0.1-0.3".

Type	Pendant light Suspension
Environment	Indoor Mounting
Dimensions [cm/in]	21 heads Length: 80cm/31.5", Height: 400cm/157.5". Standard hanging wire length provided: 400cm/157.5". Additional lengths available upon request (prices upon request)
Light source	Standard: Compatible with G4 socket G4 Bi-Pin Base Bulbs, AC 110V(Do Not Use in Low Voltage 12V). (Not included bulbs)
Finishes	Lamp body: White. Available for selection.
Construction material	Ceramics. If damaged during transportation, it can be reissued.


Drawing

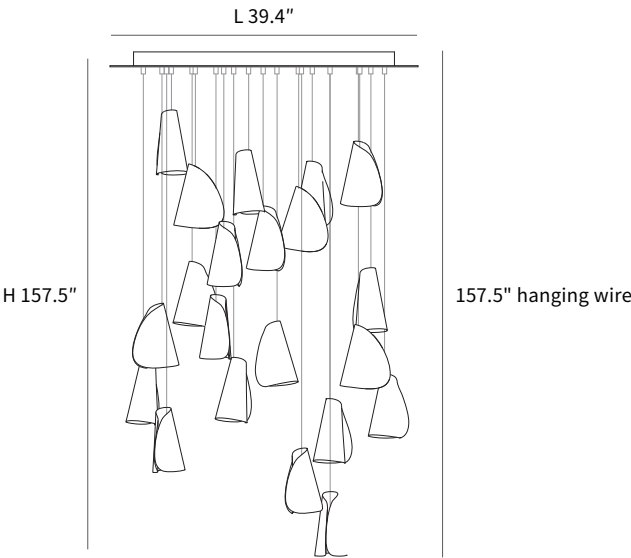

The above dimensions are measured manually and may have an error of 0.1-0.3".

Type	Pendant light Suspension
Environment	Indoor Mounting
Dimensions [cm/in]	26 heads Length: 100cm/39.4", Height: 400cm/157.5". Standard hanging wire length provided: 400cm/157.5". Additional lengths available upon request (prices upon request)
Light source	Standard: Compatible with G4 socket G4 Bi-Pin Base Bulbs, AC 110V(Do Not Use in Low Voltage 12V). (Not included bulbs)
Finishes	Lamp body: White. Available for selection.
Construction material	Ceramics. If damaged during transportation, it can be reissued.


Drawing

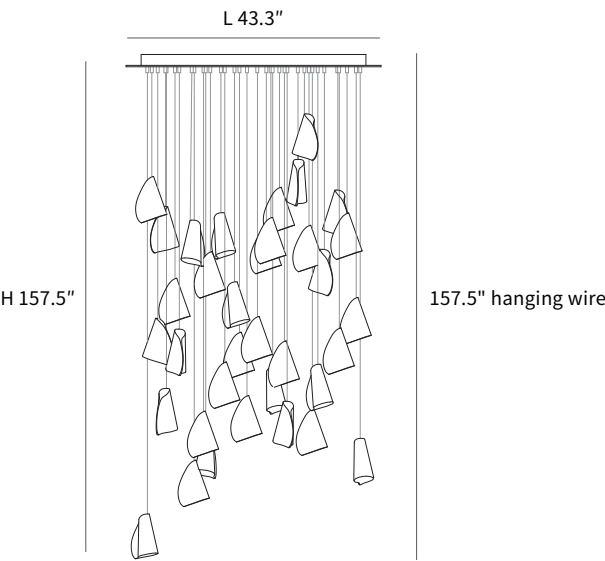

The above dimensions are measured manually and may have an error of 0.1-0.3".

Type	Pendant light Suspension
Environment	Indoor Mounting
Dimensions [cm/in]	36 heads Length: 110cm/43.3", Height: 400cm/157.5". Standard hanging wire length provided: 400cm/157.5". Additional lengths available upon request (prices upon request)
Light source	Standard: Compatible with G4 socket G4 Bi-Pin Base Bulbs, AC 110V(Do Not Use in Low Voltage 12V). (Not included bulbs)
Finishes	Lamp body: White. Available for selection.
Construction material	Ceramics. If damaged during transportation, it can be reissued.

Drawing

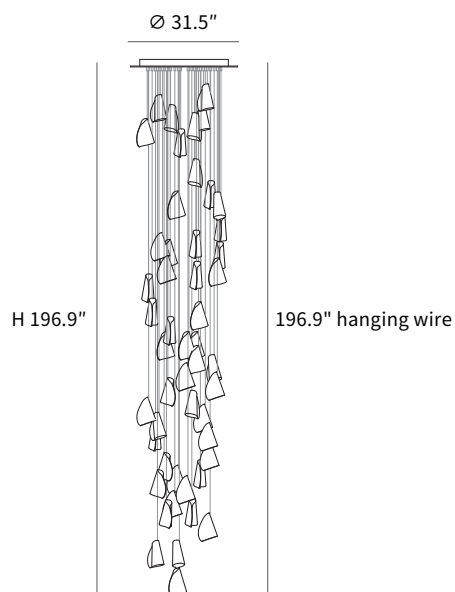

The above dimensions are measured manually and may have an error of 0.1-0.3".

Type	Pendant light Suspension
Environment	Indoor Mounting
Dimensions [cm/in]	50 heads Diameter: 80cm/31.5", Height: 500cm/196.9". Standard hanging wire length provided: 500cm/196.9". Additional lengths available upon request (prices upon request)
Light source	Standard: Compatible with G4 socket G4 Bi-Pin Base Bulbs, AC 110V(Do Not Use in Low Voltage 12V). (Not included bulbs)
Finishes	Lamp body: White. Available for selection.
Construction material	Ceramics. If damaged during transportation, it can be reissued.