


- 1:Tighten the lamp arm with a nut
- 2:The power cord of the lamp arm is connected to the main line, L/N
- 3:After the lamp arm point wire and the main wire are connected, lock the bottom manual nut
- 4:Steel wire hanging wire and ceiling plate installed together
- 5:Fix the hanging board to the ceiling
- 6:Connect the lamp wires to the reserved wires
- 7:Connect the lamp body to the hanging plate
- 8:Insert G9 light source
- 9:Insert the leaves randomly

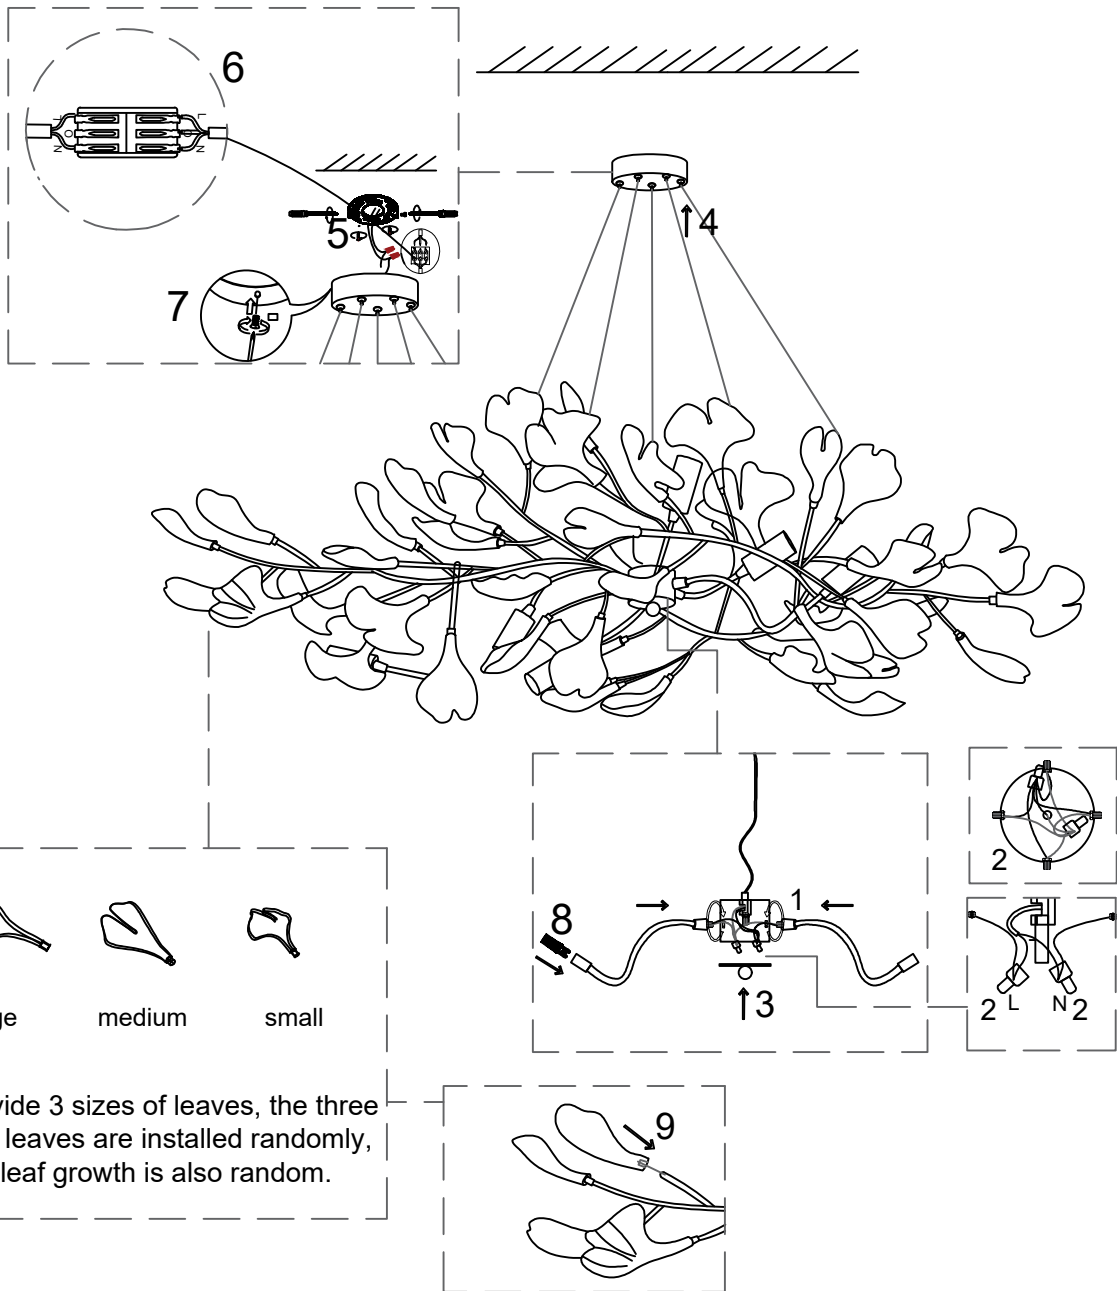

We provide 3 sizes of leaves, the three types of leaves are installed randomly, and the leaf growth is also random.