


# SPECIFICATION SHEET

---

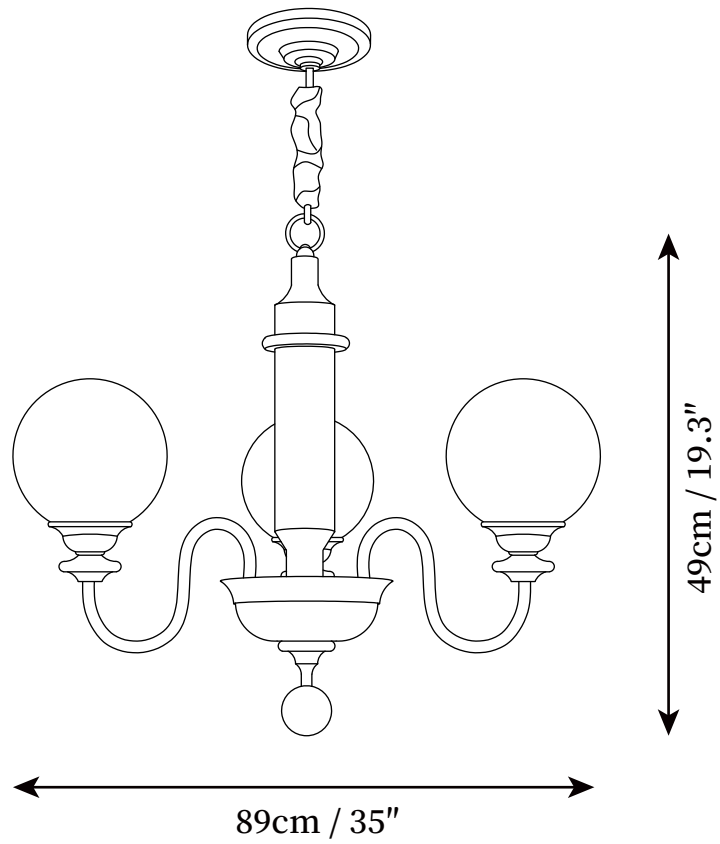


## SPECIFICATION DETAILS

\*For custom options, consult factory for details

<b>Fixture Dimensions</b>	D 25.2" x H 19.3" (3 Heads)
<b>Light source</b>	E26 or E27 (bulb not included)
<b>Wattage</b>	MAX 40W incandescent bulb or LED equivalent.
<b>Voltage</b>	AC 110-240V
<b>Mounting</b>	Hardwired.
<b>Dimming</b>	Compatible with dimmable bulbs (bulb not included)
<b>Control method</b>	Compatible with common wall switches (
<b>Finishes</b>	Black, Walnut color, Gold, Chrome.
<b>Shade Details</b>	White.
<b>Material</b>	Wood, Glass, Metal.
<b>Hanging Length</b>	Chain lengths range between 19.7", the length can be specified according to needs

# SPECIFICATION SHEET

---

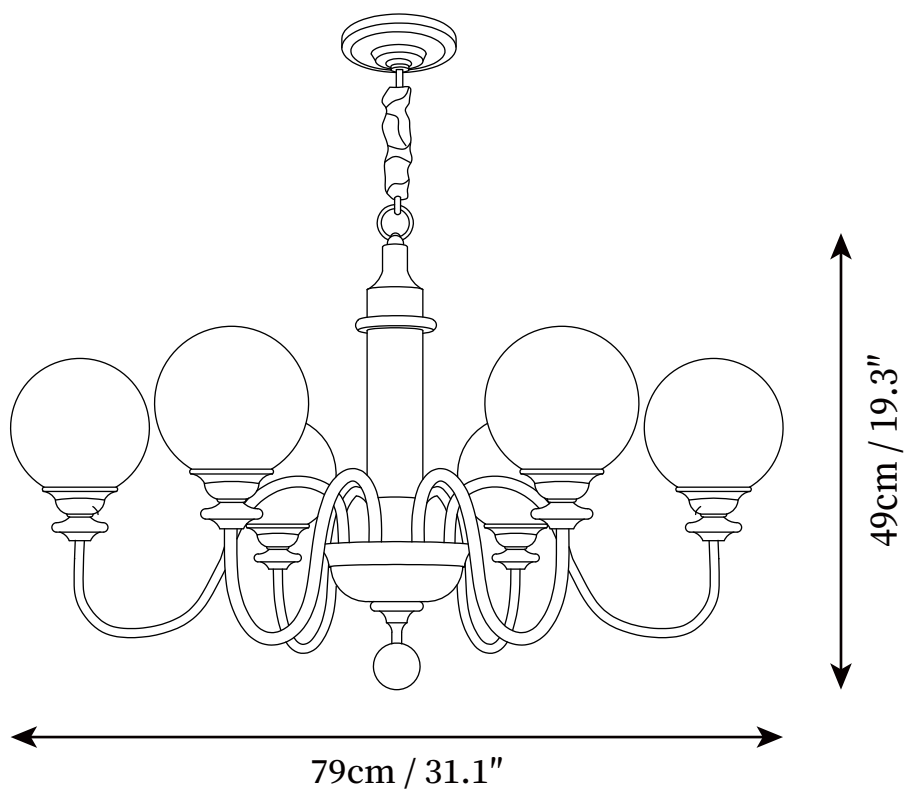


## SPECIFICATION DETAILS

\*For custom options, consult factory for details

<b>Fixture Dimensions</b>	D 31.1" x H 19.3" (6 Heads)
<b>Light source</b>	E26 or E27 (bulb not included)
<b>Wattage</b>	MAX 40W incandescent bulb or LED equivalent.
<b>Voltage</b>	AC 110-240V
<b>Mounting</b>	Hardwired.
<b>Dimming</b>	Compatible with dimmable bulbs (bulb not included)
<b>Control method</b>	Compatible with common wall switches (
<b>Finishes</b>	Black, Walnut color, Gold, Chrome.
<b>Shade Details</b>	White.
<b>Material</b>	Wood, Glass, Metal.
<b>Hanging Length</b>	Chain lengths range between 19.7", the length can be specified according to needs

# SPECIFICATION SHEET

---

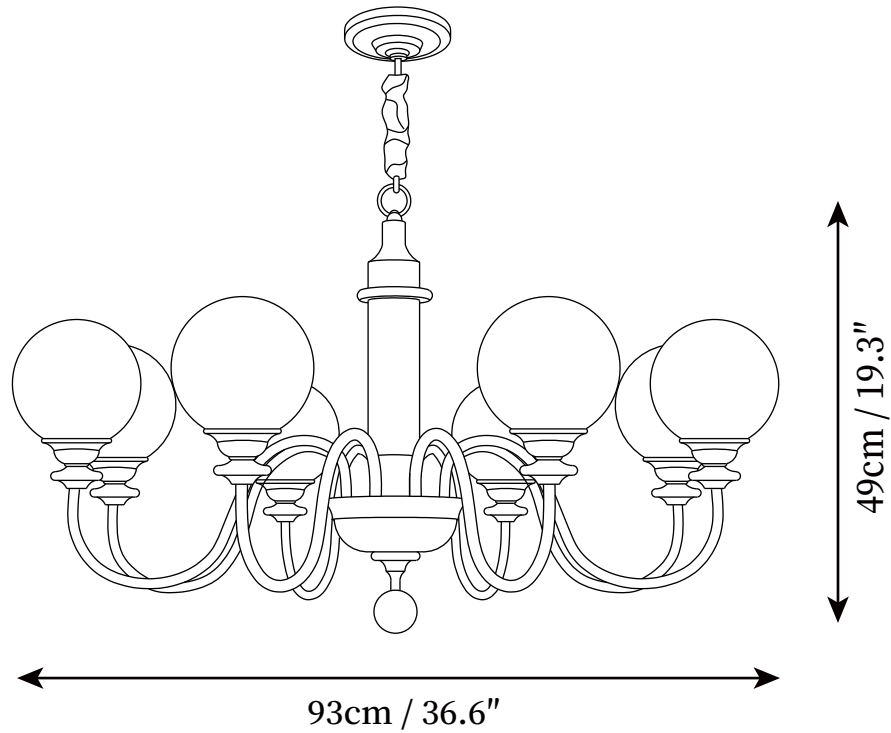

## SPECIFICATION DETAILS

\*For custom options, consult factory for details

<b>Fixture Dimensions</b>	D 36.6" x H 19.3" (8 Heads)
<b>Light source</b>	E26 or E27 (bulb not included)
<b>Wattage</b>	MAX 40W incandescent bulb or LED equivalent.
<b>Voltage</b>	AC 110-240V
<b>Mounting</b>	Hardwired.
<b>Dimming</b>	Compatible with dimmable bulbs (bulb not included)
<b>Control method</b>	Compatible with common wall switches(not included)
<b>Finishes</b>	Black, Walnut color, Gold, Chrome.
<b>Shade Details</b>	White.
<b>Material</b>	Wood, Glass, Metal.
<b>Hanging Length</b>	Chain lengths range between 19.7", the length can be specified according to needs