

1 Take all the accessories out of the packaging first


2 Use screws to lock the lamp body and chassis

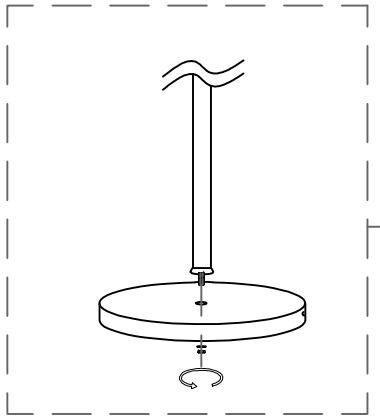

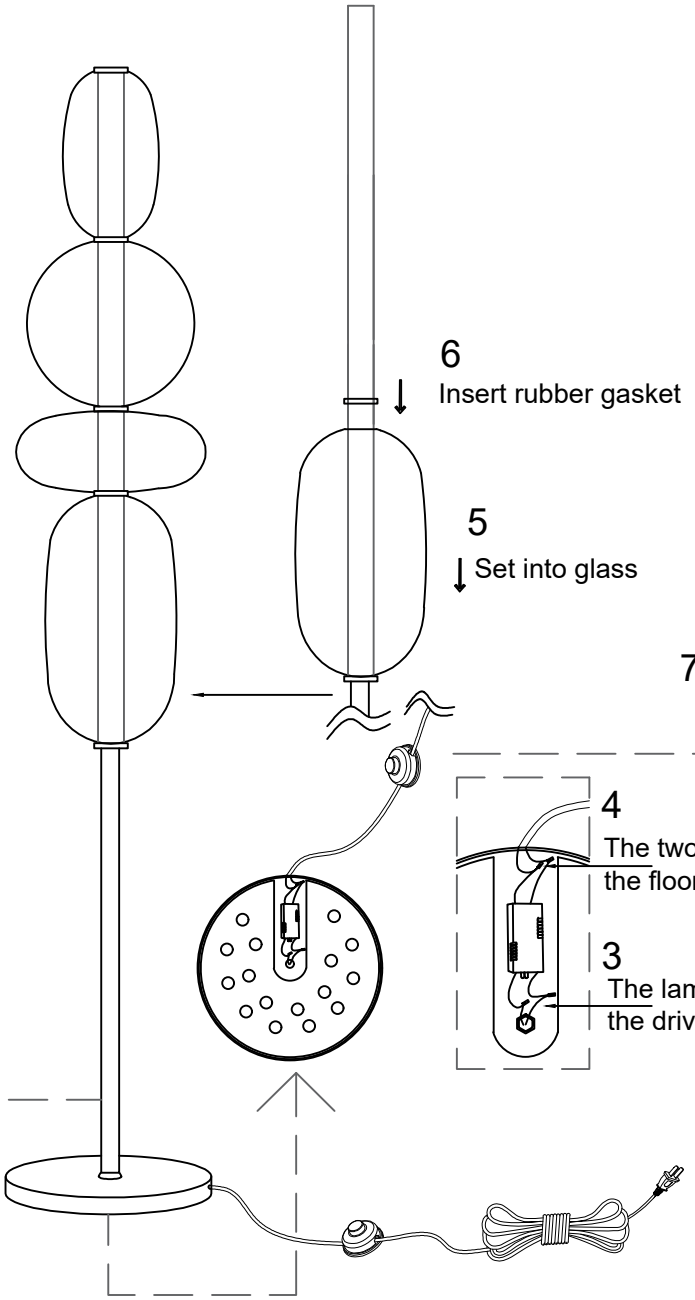

6
Insert rubber gasket

5
Set into glass

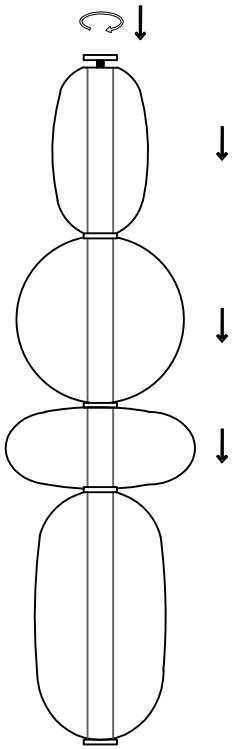

7
After inserting the glass, finally rotate and tighten the fasteners.

4
The two driven wires are connected to the floor lamp wires with electrical tape.

3
The lamp body wires are connected to the driving wires with electrical tape.