



Instructions

1

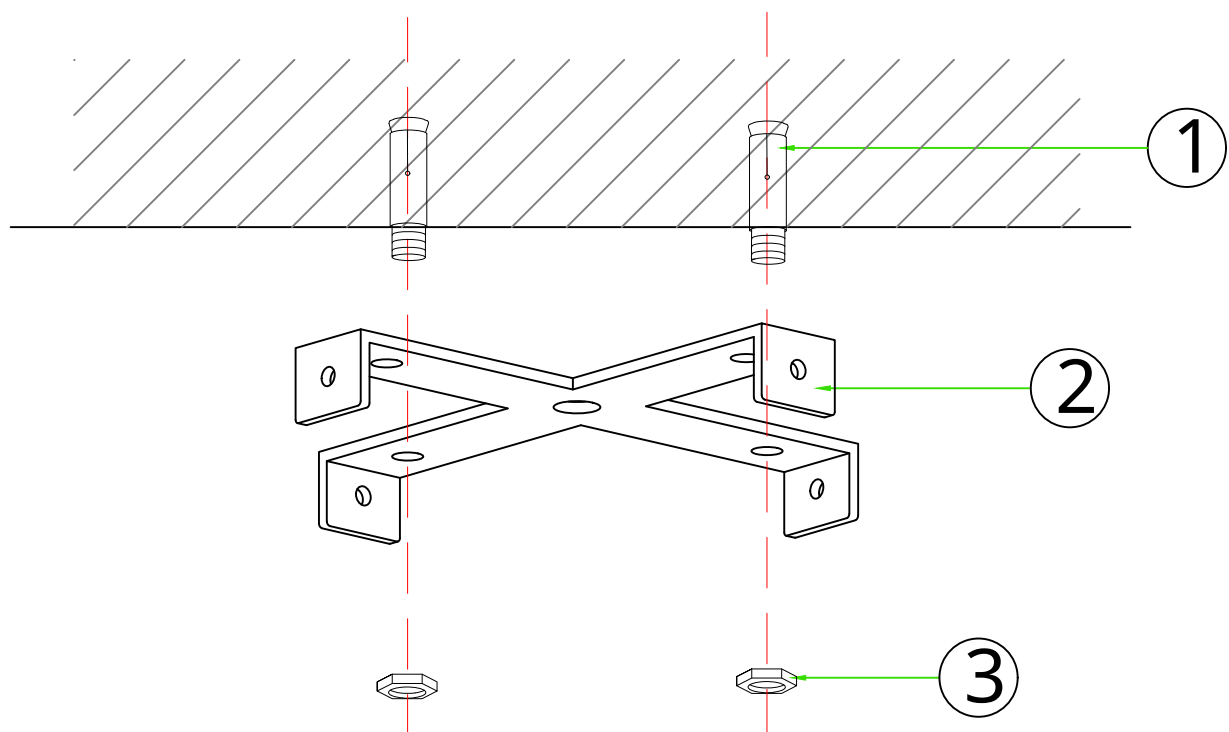


- 1,First remove the one-line hanging plate on the chassis;
- 2, use a hanging board to measure the drilling position at the predetermined position for installing the lamp, and use Ø6 Drill out the fixing holes;
- 3,Bundle M6 Drill the expansion screws into the fixing holes, place the vertical hanging board and then use the matching M6 The screws are locked.

2

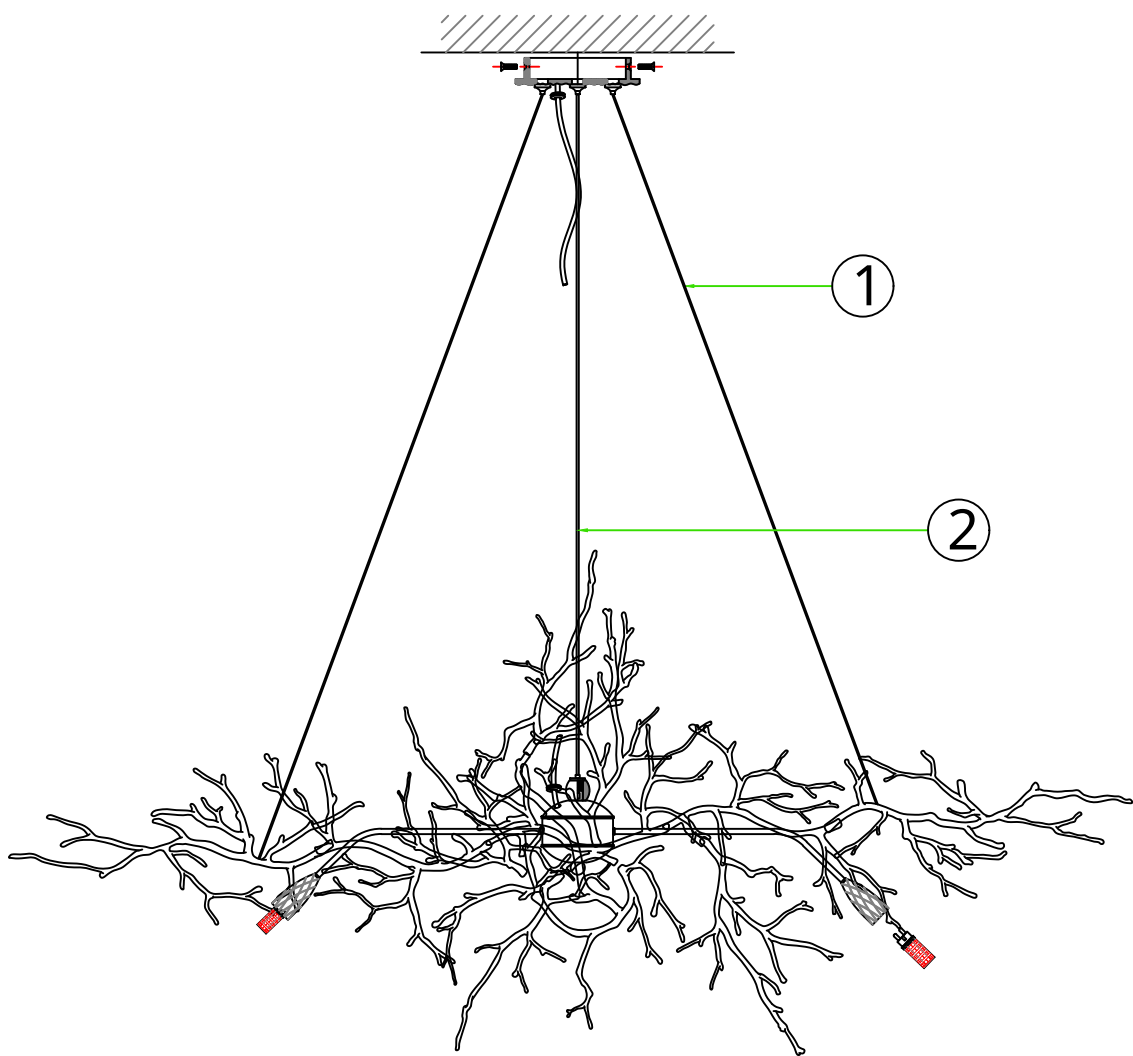

- 1,Take out the lamp body and check the firmness of the lamp body;
- 2, take out the main lamp holder and check the integrity;
- 3,Leveling serial number 1; Adjust the height of the lamp body to the scene so that the lamp body reaches balance.
- 4,Press and hold the serial number 2 The upper ceiling cover pulls the tension head, adjust the height, and make it serial 2 Place the lamp in the center of the main body and tighten the power cord.

3

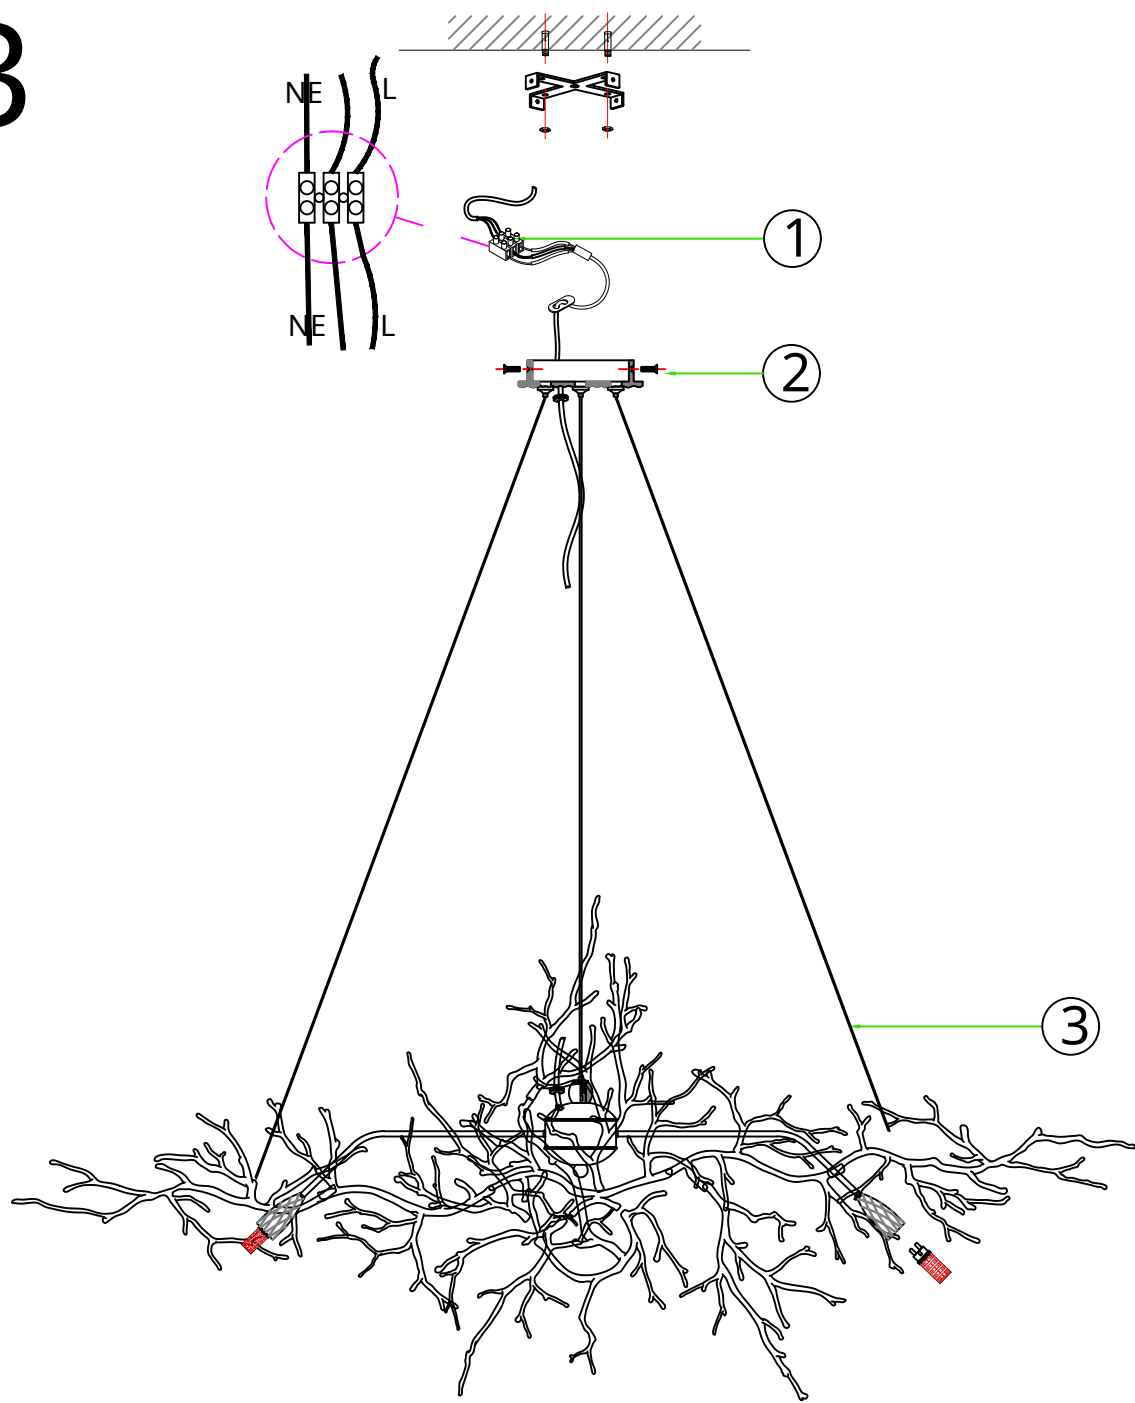


- 1,Lift the installed lamp body to the bracket position and connect the wires, then lift and align the screw holes;
2. Lock with matching screws;
3. Install the light source and test the brightness;

Warning: Please do not use corrosive drugs such as gasoline and alcohol disinfectants.
Wipe the light fixture, otherwise it will be damaged.

Precautions:

1. This light can only be used indoors;
2. Do not turn on the power before the lamp is assembled.

4

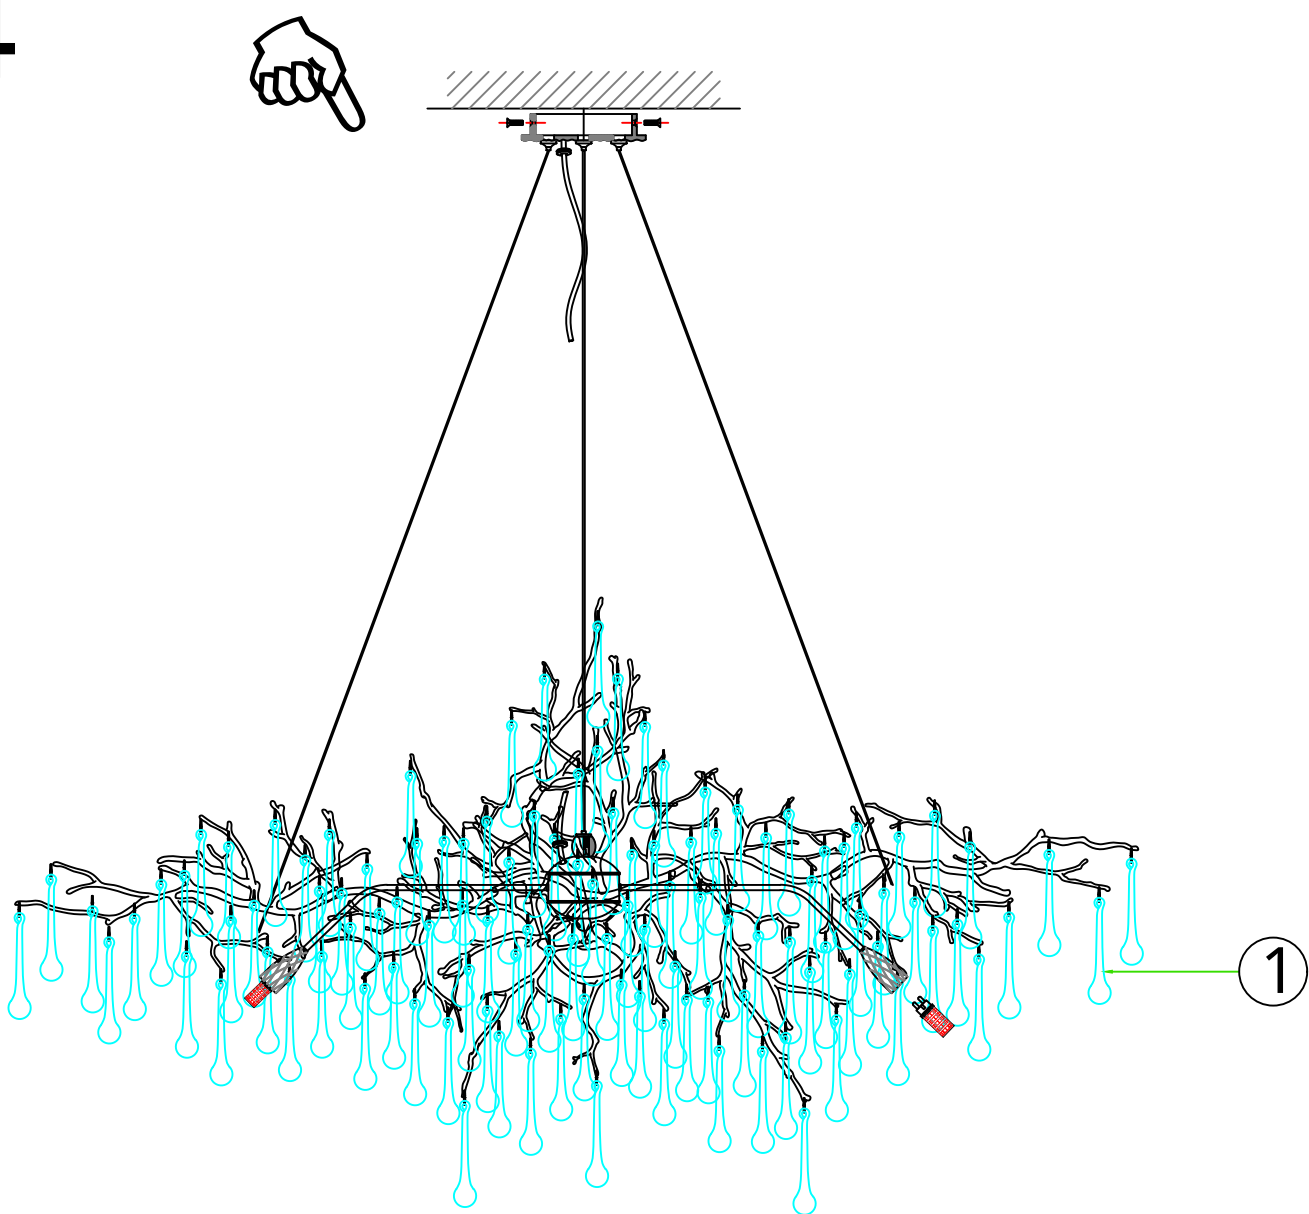

Note: Not all holes must be hung with crystals.
Just distribute the crystals evenly according to the crystals provided by the manufacturer.

- 1, Hang the crystal and complete the installation

Repair and maintenance:

In order to use this product safely and efficiently, please clean the lamp body regularly (once a month). Before cleaning, cut off the power supply and wait until the lamp body cools to normal temperature. Then use a soft rag dipped in clean water to wring it out and wipe it.