



1 Take all the accessories out of the packaging first


2 Use screws to lock the lamp body and chassis

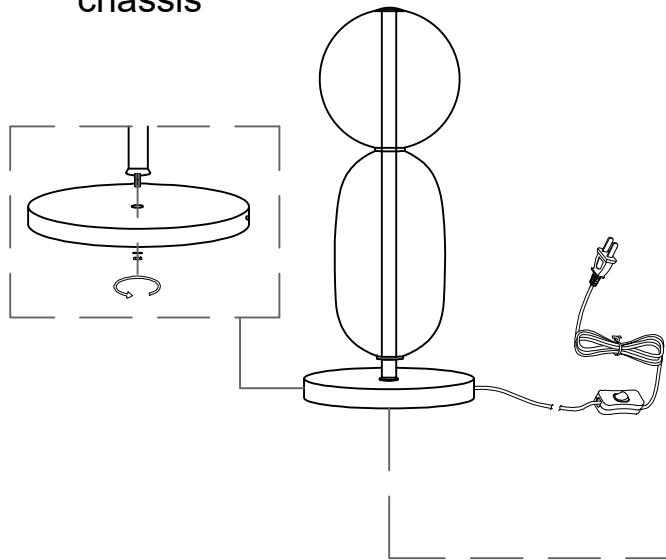


6 Insert rubber gasket

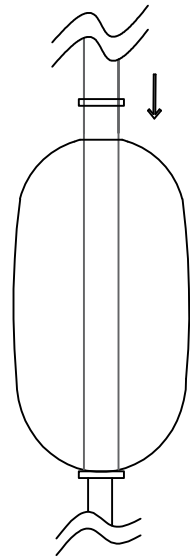

5
↓ Set into glass

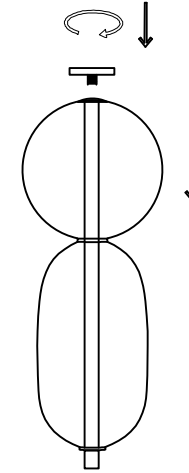

7
After inserting the glass, finally rotate and tighten the fasteners.

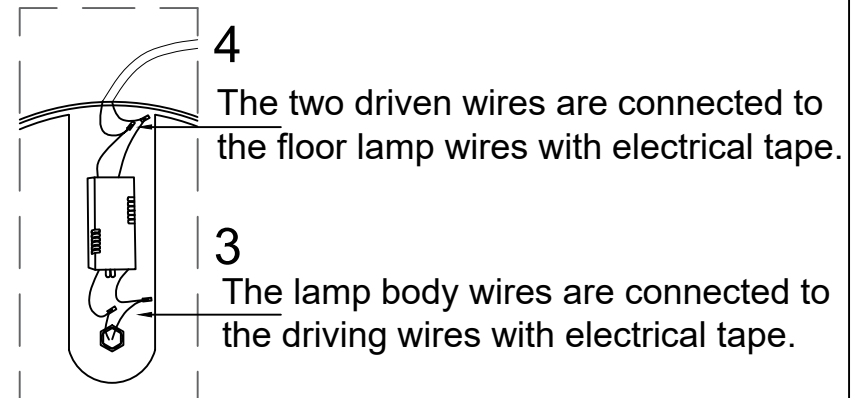

4
The two driven wires are connected to the floor lamp wires with electrical tape.

3
The lamp body wires are connected to the driving wires with electrical tape.