
1:Assembly of lamp body

2:Fix the hanging board to the wall

3:Connect the lamp wires to the reserved wires

4:Fix the wall box and hanging board from the side

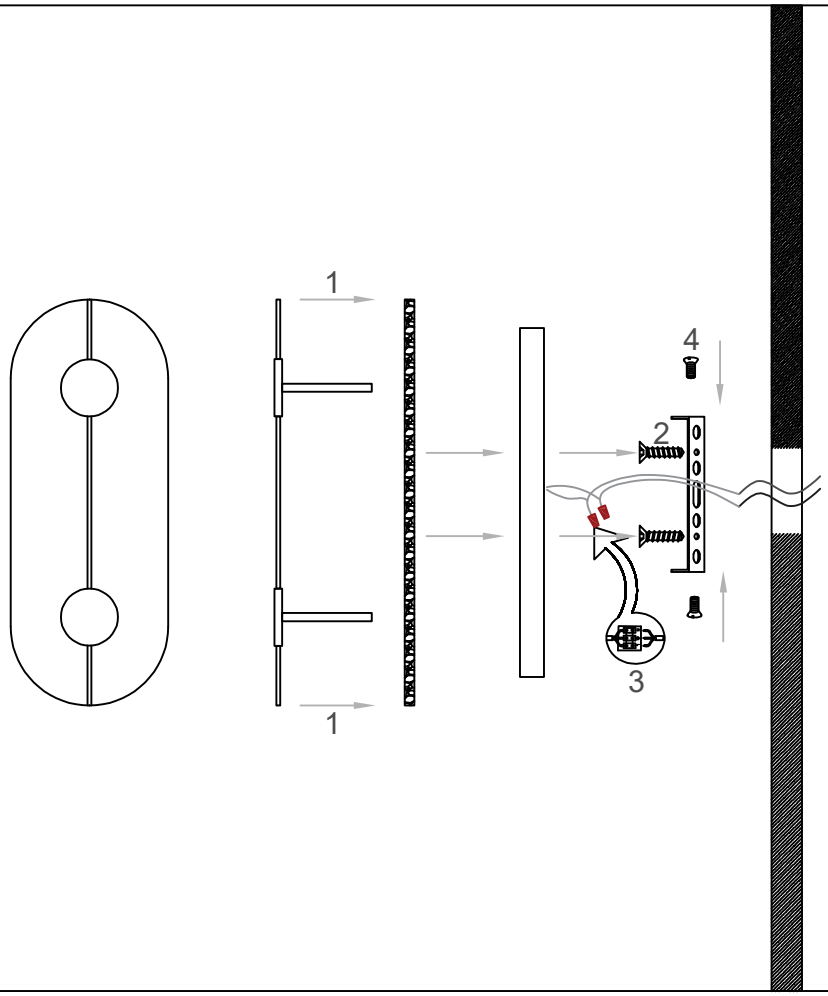

1.All L live wires of the light arm lead are connected to the main L live wire, and all N zero wires of the light arm lead are connected

2. Clamp with a wiring cap, tighten the connection and strengthen the insulation with a heat shrink tube.

3. Connect and lock the main ground wire to a separate grounding device on the lamp body.

4. All LED light sources are connected in series (excluding high-voltage LEDs).

5. The LED light source is connected to the driver, and the power cord must be divided into positive and negative poles (excluding high-voltage LEDs).

6. Connecting incorrectly can lead to no lights, short circuits flickering, or burning.