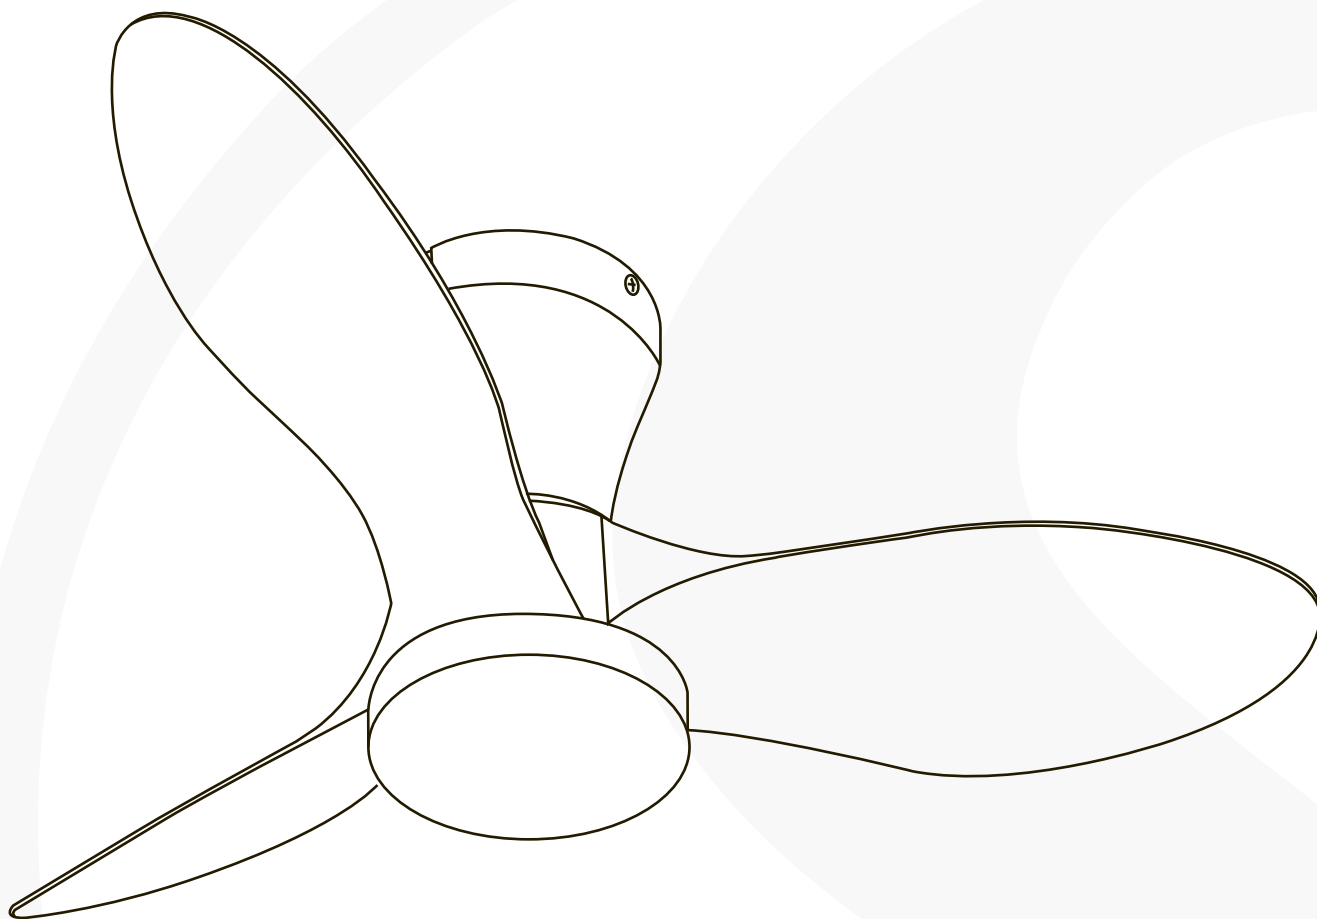


USE AND CARE GUIDE



01 Safety Information

1. To reduce the risk of electric shock, ensure the electricity has been turned off at the circuit breaker or fuse box before you begin.
2. All wiring must be in accordance with the National Electrical Code ANSI/NFPA 70-1999 and local electrical codes. Electrical installation should be performed by a qualified licensed electrician.
3. The outlet box and support structure must be securely mounted and capable of reliably supporting 35 lbs. (15.9 kg). Use only UL Listed outlet boxes marked "Acceptable for Fan Support of 35 lbs. (15.9 kg) or less".
4. The fan must be mounted with a minimum of 7 ft. (2.1 m) clearance from the trailing edge of the blades to the floor.
5. Do not operate the reversing switch while the fan blades are in motion. You must turn the fan off and stop the blades before you reverse the blade direction.
6. Do not place objects in the path of the blades.
7. To avoid personal injury or damage to the fan and other items, use caution when working around or cleaning the fan.
8. Electrical diagrams are for reference only. Light kits that are not packed with the fan must be UL-listed and marked suitable for use with the model fan you are installing. Switches must be UL General Use Switches. Refer to the instructions packaged with the light kits and switches for proper assembly.
9. After making electrical connections, spliced conductors should be turned upward and pushed carefully up into the outlet box. The wires should be spread apart with the grounded conductor and the equipment-grounding conductor on one side of the outlet box.
10. All setscrews must be checked and re-tightened where necessary before installation.



WARNING: To reduce the risk of personal injury, do not bend the blade brackets (also referred to as flanges) during assembly or after installation. Do not insert objects in the path of the blades.



WARNING: Remove the rubber motor stops on the bottom of the fan before installing the blades or testing the motor.



WARNING: To reduce the risk of fire or electric shock, this fan is NOT suitable for use with solid-state speed controls.



WARNING: To avoid possible electrical shock, make sure that the electricity is turned off at the main power box before starting work. If you feel you do not have enough electrical wiring knowledge or experience, contact a licensed electrician.



WARNING: Electrical diagrams are for reference only. Optional use of any light kit shall be UL-listed and marked suitable for use with this fan



WARNING: To reduce the risk of fire, electrical shock or personal injury, ensure that the fan mounting bracket is supported directly from the building structure or the outlet box marked "Acceptable for Fan Support of 35 lbs. (15.9 kg) or less". Use only the screws provided with the outlet box.

02 Pre-Installation

TOOLS REQUIRED



Phillips
screwdriver



Flat blade
screwdriver



Step
ladder



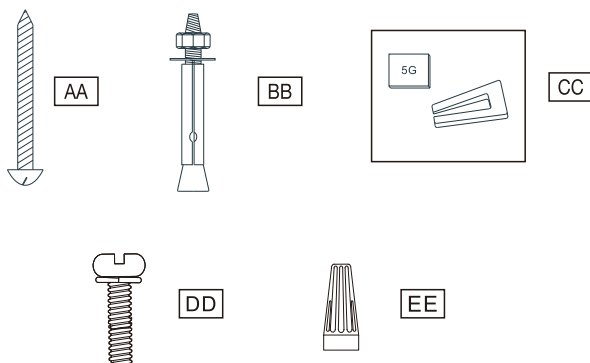
Wire
stripper



Electrical
tape

03 Pre-Installation(continued)









HARDWARE INCLUDED components table

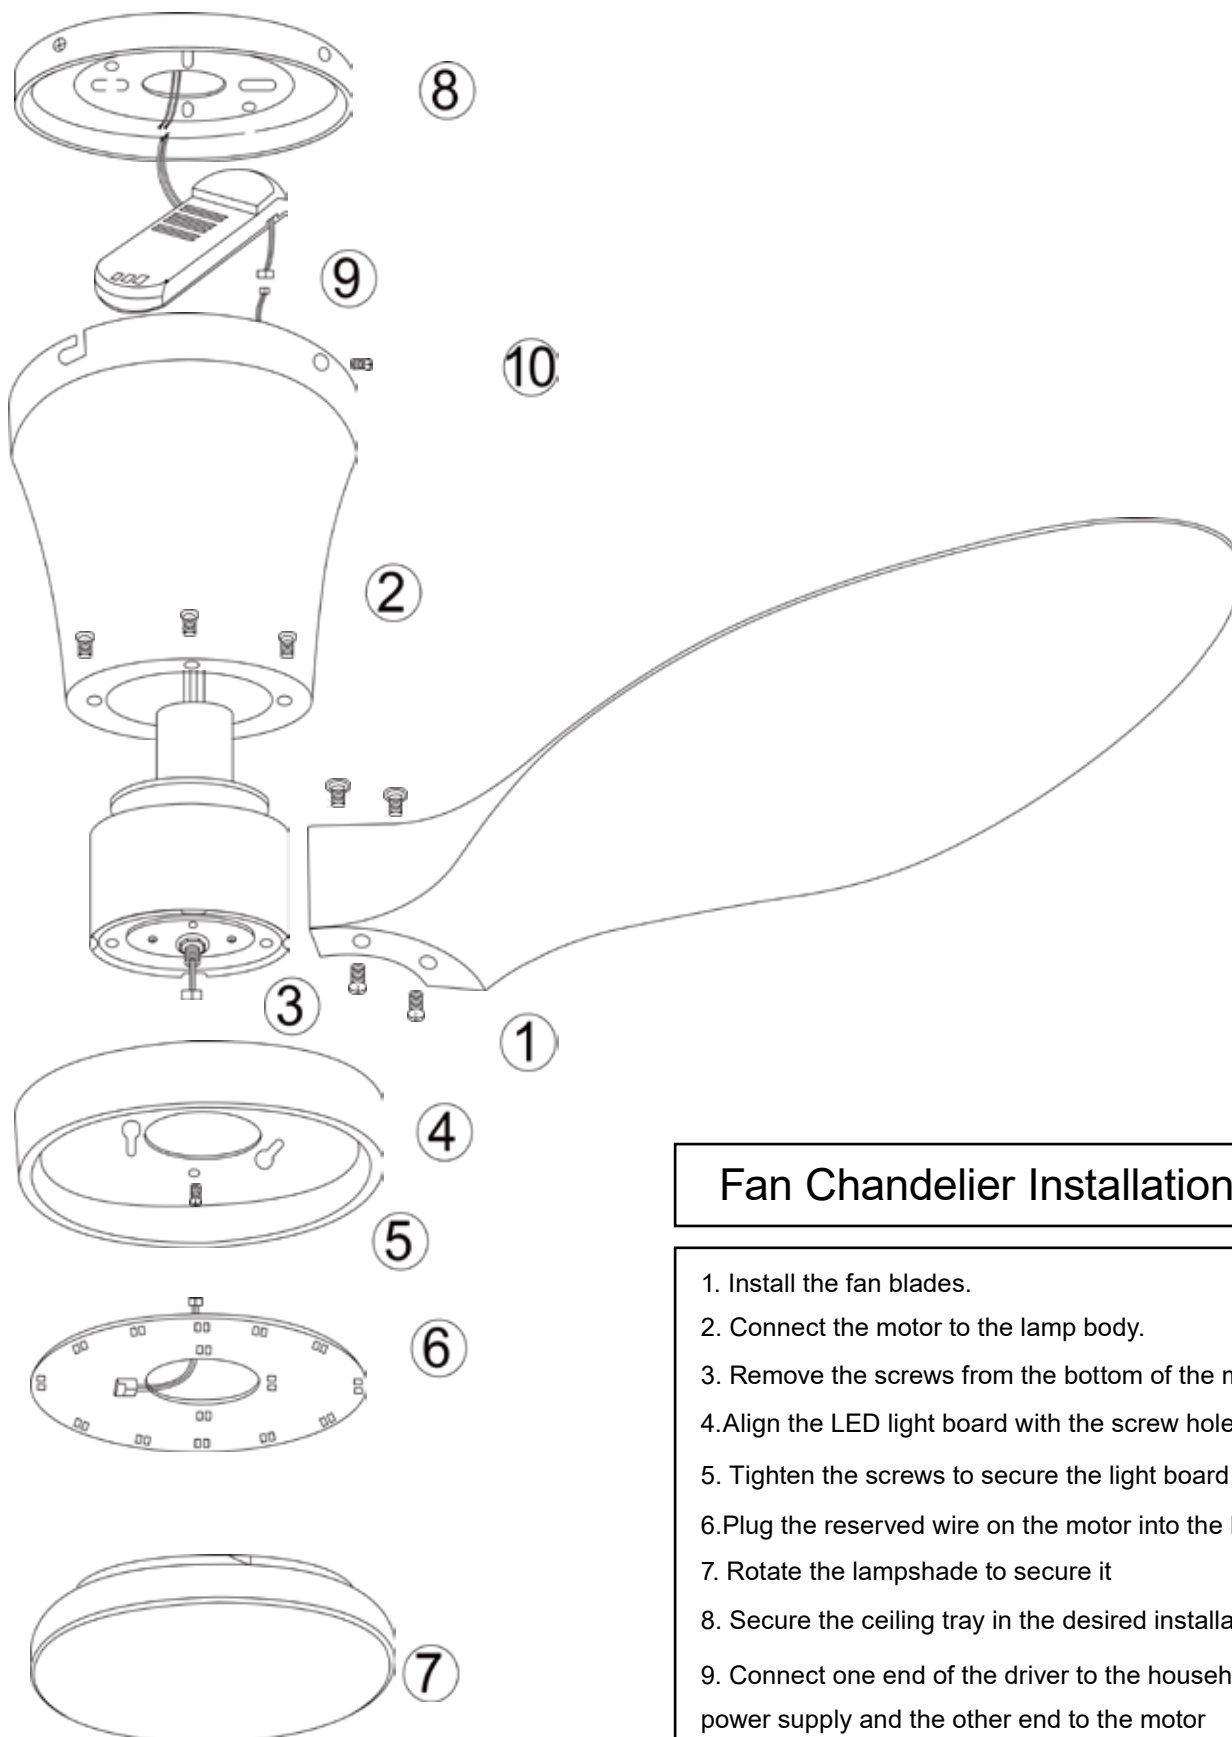


NOTE: Hardware not shown to actual size.

AA	Mounting screws	4
BB	Expansion Bolts	2
CC	Balanced parts package	1
DD	Blade attachment screw and fiber washer (preassembled)	6
EE	Plastic wire nut(not to scale)	4

PACKAGE CONTENTS

									
A	Fan motor assembly	1	B	Motor	1	Fan Blades			3
									
C	Ceiling Tray	1	D	LED light source	1	E	Light kit fitter assembly	1	
									
F	Acrylic lampshade	1	G	Remote control	1	H	Remote control (receiver)	1	

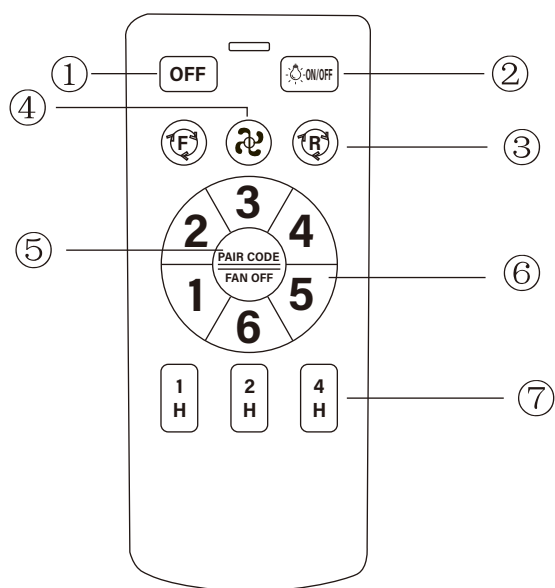


Fan Chandelier Installation Manual

1. Install the fan blades.
2. Connect the motor to the lamp body.
3. Remove the screws from the bottom of the motor.
4. Align the LED light board with the screw holes at the bottom.
5. Tighten the screws to secure the light board to the motor.
6. Plug the reserved wire on the motor into the LED light source.
7. Rotate the lampshade to secure it.
8. Secure the ceiling tray in the desired installation location.
9. Connect one end of the driver to the household power supply and the other end to the motor.
10. Align the ceiling fan with the screw holes on the ceiling tray and secure it in place.

Note: Be sure to cut off the power supply and do a good job of insulation during installation.

04 Use of remote control



- ① **ALL OFF:** Turn off the lights and fans at the same time
- ② **Turn lights on/off/change light color**
- ③ **F/R:** Changing fan run direction (15 sec)
- ④ **Natural breeze**
- ⑤ **Fan switch**
- ⑥ **1-6 speed settings**
- ⑦ **Timer:** It will turn off the light and the fan when the time is over

Note: the remote control must match the same code receiver

05 Remote control wiring diagram

WARNING: Remove the rubber motor stops on the bottom of fan before installing the blades or testing the motor.

WARNING: Turn off the electric power during installation and making wire connection.

1. Connect the wire which from ceiling fan into the receiver.
2. Connect the wire from receiver with the wire from house.

